

# PRODUCT ID: 48641

## Outdoor Blank-out LED Direct-view Sign

### MODEL

TCL77DRR-224/12-24VDC



### DIMENSIONS

7" H x 7" W x 5.5" D (est. 3.908 lbs)

### CLASS

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: Corrosion resistant, extruded aluminum frame. 5.5" deep, mitered construction.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Double Faced Sign

Finish: Duranodic Bronze

Mounting Channel: None

### ELECTRICAL

Flashing: Factory setting 55fpm.

Input Voltage: 12-24 VDC

Photodimming: None

UL/cUL Listed: Listed for wet locations

### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

| MESSAGE                      | LED/COLOR          | HEIGHT | AMPS        |
|------------------------------|--------------------|--------|-------------|
| Red Indicator Dot            | Red Wide Angle LED | 4.0"   | 0.333-0.167 |
| Red Indicator Dot (Flashing) | Red Wide Angle LED | 4.0"   | 0.333-0.167 |
| Red Indicator Dot            | Red Wide Angle LED | 4.0"   | 0.333-0.167 |
| Red Indicator Dot (Flashing) | Red Wide Angle LED | 4.0"   | 0.333-0.167 |

NOTE: Above messages are independently controlled.

### Directional Systems

2201 W 50th St.

Erie, PA 16509

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com


Website: www.directionalsystems.com




## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

Side A

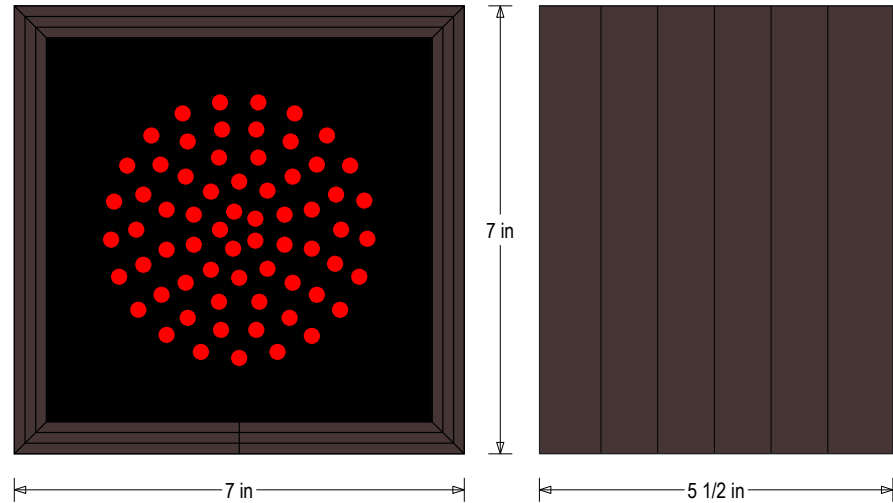

Side B

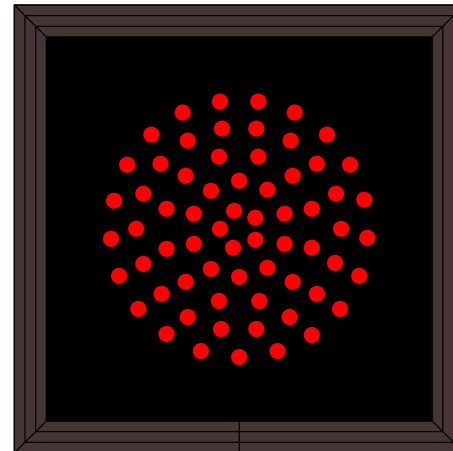

Frame Detail

