

**PRODUCT ID: 25929**  
Outdoor Blank-out LED Backlit Sign

**MODEL**  
PHX734G-150/120-277VAC



**DIMENSIONS**  
7" H x 34" W x 2.5" D (est. 7.151 lbs)

**CLASS**  
**Class:** PHX Series  
**Control Method:** Switch (not included) or external relay.

**CONSTRUCTION**  
**Back Construction:** 0.050" Lift-n-Shift Back  
**Cabinet:** 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.  
**Face Material:** 1/8" thick, dark grey diffused acrylic  
**Faces:** Single Faced Sign  
**Finish:** Duranodic Bronze  
**Graphic:** Printed graphic applied to surface  
**Mounting Channel:** None

**ELECTRICAL**  
**Flashing:** Not Included  
**Input Voltage:** 120-277 VAC  
**UL/cUL Listed:** Listed for wet locations

**MESSAGE**  
**Color:** Black opaque  
**Font:** Swiss 721 Bold BT  
**Illumination:** Backlit with high intensity LEDs. Message blanks out when off  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
COMMERCIAL	Green Wide Angle LED	3.5"	0.347-0.150


NOTE: Above messages are independently controlled.

**Directional Systems**  
2201 W 50th St.  
Erie, PA 16509  
Phone: (877) 827-8296  
Fax: (877) 827-8291  
Email: [sales@directionalsystems.com](mailto:sales@directionalsystems.com)  
Website: [www.directionalsystems.com](http://www.directionalsystems.com)



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

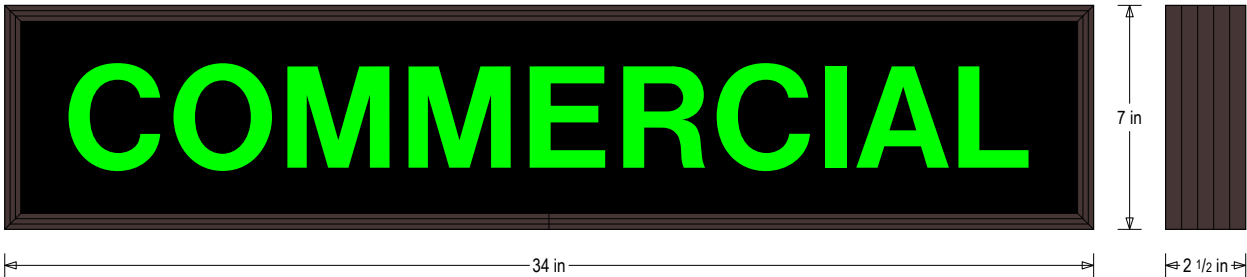

Frame Detail

