

Recessed Frame Wall Mount RF734

PRODUCT NUMBER

3018

FRAME DIMENSIONS

10" H x 37" W x 2" D

WALL OPENING

7.5" H X 34.5" W

INSTALLATION METHOD

1/8" bent aluminum plate. Painted standard Duranodic Bronze.

SYSTEM USES

Available for all signs.

CONSTRUCTION

Bent aluminum frame bolted to sign cabinet. Frame bolts to wall surface with appropriate fasteners (not supplied). Painted standard Duranodic Bronze.

FINISH

Standard Duranodic Bronze. Custom sizes and colors upon request.

Directional Systems

1419 West 26th St.

Erie, PA 16508

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com

Website: www.directionalsystems.com



Directional Systems


Proudly Made in the USA

Copyright (C) 2012 Directional Systems


Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.


TOP VIEW

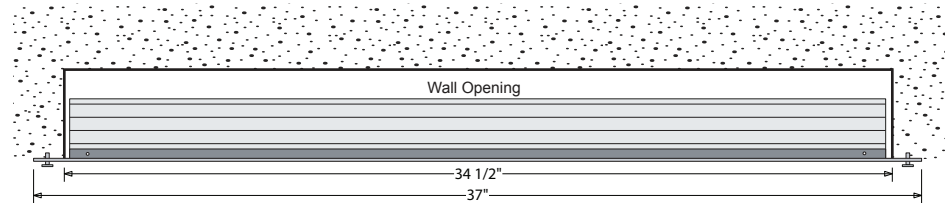


FRONT VIEW

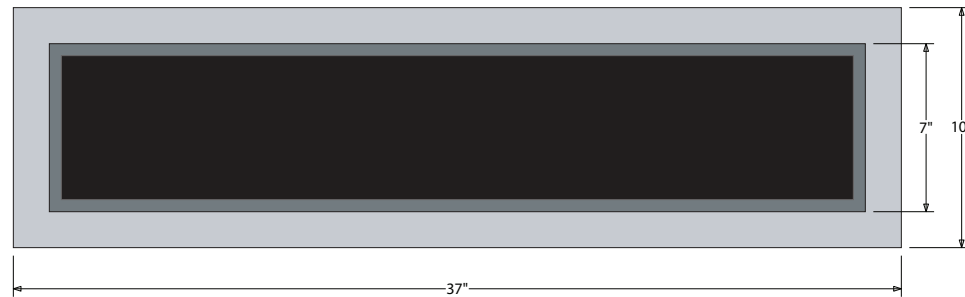

SIDE VIEW



Installation



Recessed Frame Mount

- Fasten the recessed mounting bracket flush with the front of the LED traffic controller cabinet, with the supplied fasteners.
- Slide assembled unit into the recess opening.
- Fasten the mounting bracket to the face of the opening with four fasteners (Not Supplied).

Note: Make appropriate wiring connections per local codes.

REV 0 | 10122009 | KM