PRODUCT ID: 5019

Outdoor Blank-out LED Direct-view Sign

MODEL

TCL1212R-224H/120-277VAC



DIMENSIONS

12" H x 12" W x 2.5" D (est. 7.866 lbs)

CLASS

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: 1/8" thick aluminum hood backed with 1/8" thick, impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Duranodic Bronze Mounting Channel: None

ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC

Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off. Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Red Indicator Dot	Red Wide Angle I FD	8.0"	0.045-0.020

NOTE: Above messages are independently controlled.

Directional Systems


2201 W 50th St. Erie. PA 16509

Directional Systems Phone: (877) 827-8296 Fax: (877) 827-8291

Email: sales@directionalsystems.com Website: www.directionalsystems.com

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

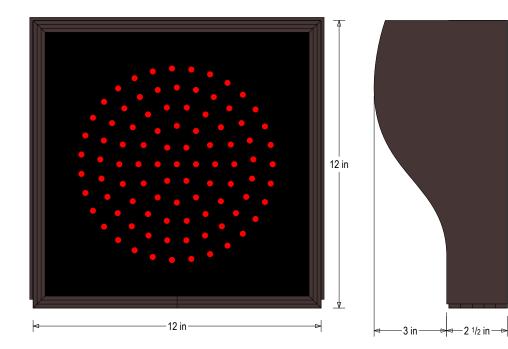

Frame Detail



02212024 | EMC