

# Incandescent Traffic Signal TCL721RAG-226

## PRODUCT NUMBER

5941

## CABINET DIMENSIONS

7" H x 21" W x 2.5" D



## ILLUMINATION SOURCE

Super bright, wide viewing angle LEDs  
Available in green, red, blue, amber, and white LEDs  
Messages "blankout" when turned off, eliminating confusion  
Long life, up to 100,000+ hours

## ELECTRICAL

Integrated solid state power supply  
Standard Voltage: 120 VAC, Optional Voltages: 9-36 V, 240 VAC, 277 VAC  
Maximum amps per lighted message (at 120 V) shown in the table below  
UL/CUL approved for wet locations

## CONSTRUCTION


Faces: Single Faced Sign  
Extrusions (TCL): Slim line continuous, corrosion resistant, aluminum housing 2.5" deep  
Face Material: Impact Resistant, Red Polycarbonate 1/8" thick, Amber Polycarbonate 1/8" thick, Green Polycarbonate 1/8" thick.

## FINISH


Standard Cabinet Color: Duranodic Bronze  
Custom colors available upon request

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

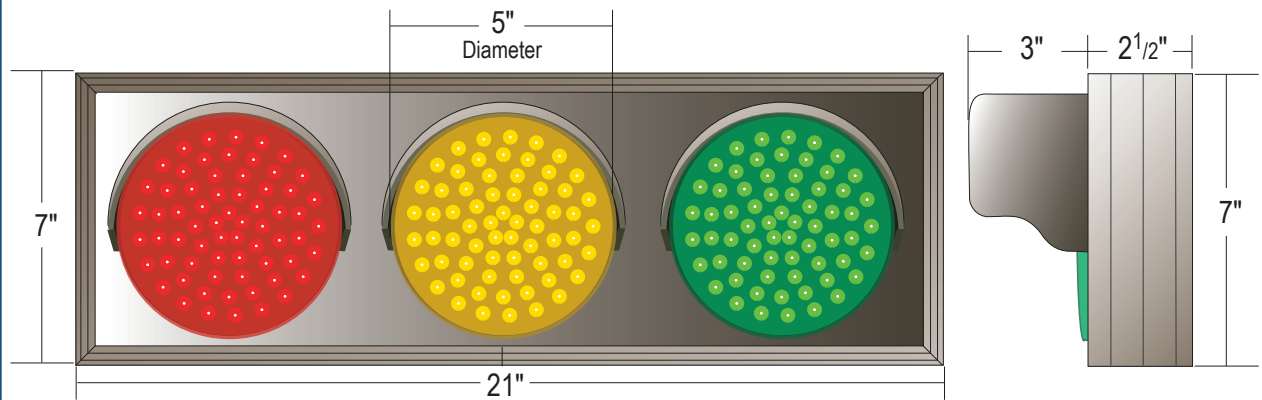

MESSAGE	COLOR	HEIGHT	AMPS
Red Indicator Dot	Red	5"	0.44
Amber Indicator Dot	Amber	5"	0.44
Green Indicator Dot	Green	5"	0.44

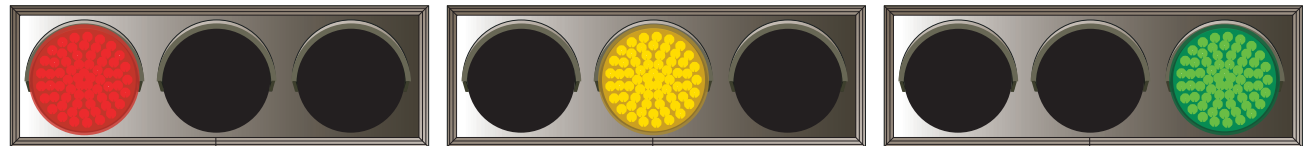

## Directional Systems

1419 West 26th St.

Erie, PA 16508

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com

Website: [www.directionalsystems.com](http://www.directionalsystems.com)



Directional Systems

Proudly Made in the USA