

PRODUCT ID: 7899

Outdoor Blank-out LED Direct-view Sign

MODEL
TCL418R-FD/120-277VAC



DIMENSIONS
4" H x 18" W x 2.5" D (est. 4.805 lbs)

CLASS
CLASS: TCL Series
Control Method: 3rd Party Integrated Protocol

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Duranodic Bronze
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Variable Message	Red Wide Angle LED	2.0"	0.160-0.069

NOTE: Above messages are independently controlled.

Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.


All Interior Hardware Is
Corrosion Resistant

Front View

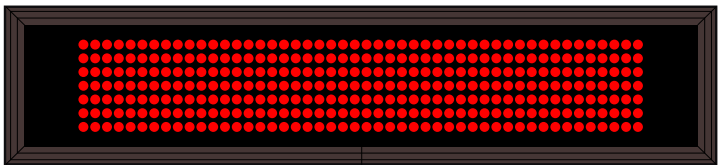


Full Matrix FEE DISPLAY
8 Characters
Characters are 2" tall
and are able to scroll

Side View



Tinted Polycarbonate Face Panel

Back View

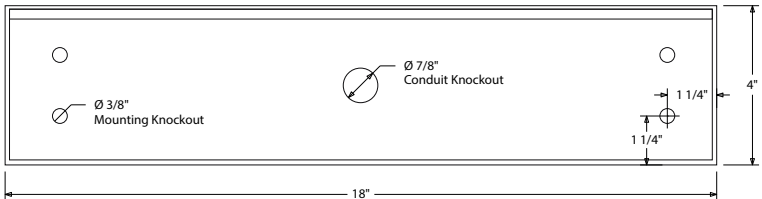

Electrical Conduit
Knockout Placement
Middle
(When Viewed From Back)



FEE Display View



CLOSED View



12-Hour Clock Display View



THANK YOU View

Compatible with HUB Parking (Zeag), T2 Systems and SKIDATA protocol.
Internal Mode DIP Switch settings are listed below.

Switch 1	Switch 2	Switch 3	Switch 4	Switch 5	Protocol
ON	OFF	OFF	OFF	OFF	HUB Parking (Zeag)
OFF	ON	OFF	OFF	OFF	T2 Systems
ON	ON	OFF	OFF	OFF	SKIDATA
OFF	OFF	OFF	OFF	ON	Test Mode
OFF	OFF	OFF	OFF	OFF	Signal-Tech

If an invalid mode is selected, the display defaults to Test Mode.

Frame Detail

