

TCI/L Flashing Raceway

Wiring Diagram


11/1/2013

Turn trimmer to manually adjust the flash rate

The 55 F.P.M. switch enforces a static flashing rate of 55 flashes per minute. When this is enabled, the manual Flash Rate trimmer is ignored.

FLASH SIG 1 and FLASH SIG 2 each cause the indicated signal to flash. Otherwise, the signals will remain steady-on. The rate is changed with the manual Flash Rate trimmer.

ALTERNATE-FLASH: When set to ON, the signals will flash opposite of one another. (FLASH SIG 1 and FLASH SIG 2 must also be enabled.) The rate is changed with the manual Flash Rate trimmer.

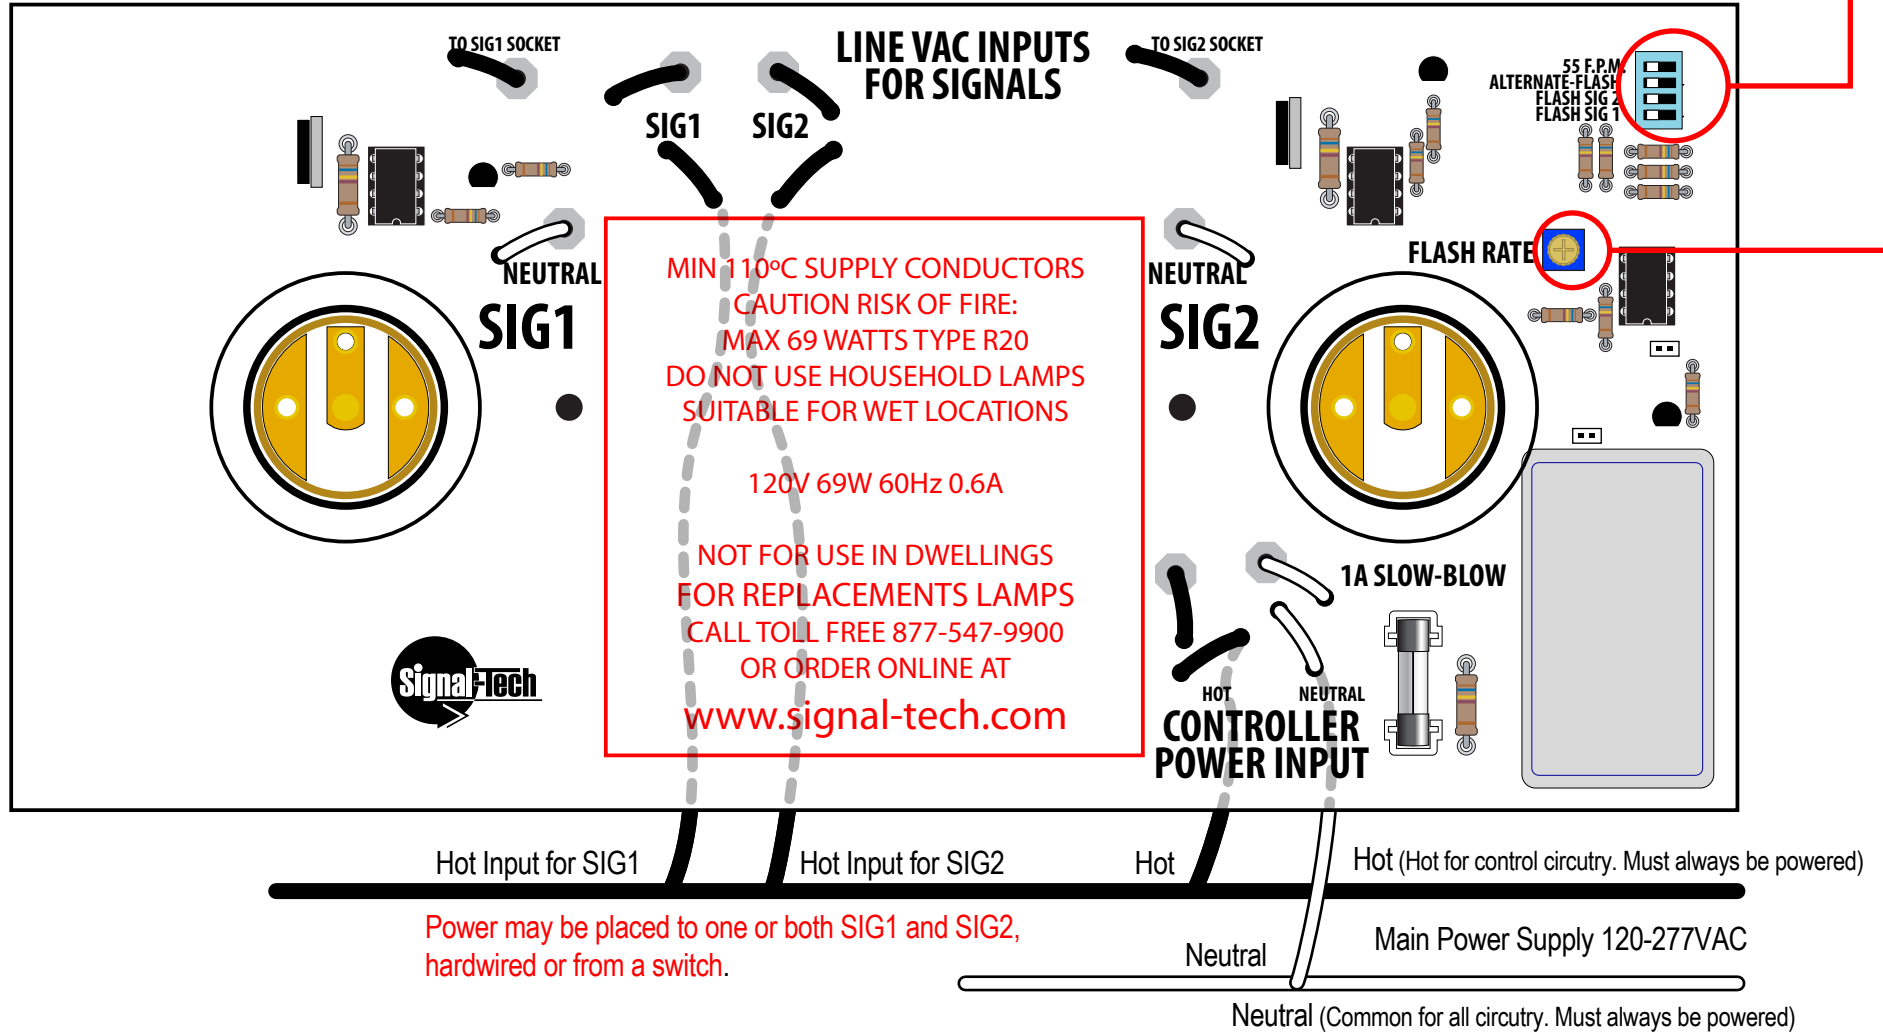

Power may be placed to one or both SIG1 and SIG2, hardwired or from a switch.

CAUTION: Voltage rating of both Light Engines **MUST** match input voltage.
(Available voltage models: 120VAC, 240VAC, 277VAC)