

PRODUCT ID: 30132
Outdoor Blank-out LED Direct-view Sign

MODEL
TCL77R-224H/12-24VDC



DIMENSIONS
7" H x 7" W x 2.5" D (est. 3.275 lbs)

CLASS
CLASS: TCL Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: Injection molded, impact resistant Lexan hood with Lexan lenses
Faces: Single Faced Sign
Finish: Duranodic Bronze
Mounting Channel: None

ELECTRICAL
Flashing: Factory setting 55fpm.
Input Voltage: 12-24 VDC
Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Red Indicator Dot	Red Wide Angle LED	4.0"	0.333-0.167
Red Indicator Dot (Flashing)	Red Wide Angle LED	4.0"	0.333-0.167


NOTE: Above messages are independently controlled.

Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

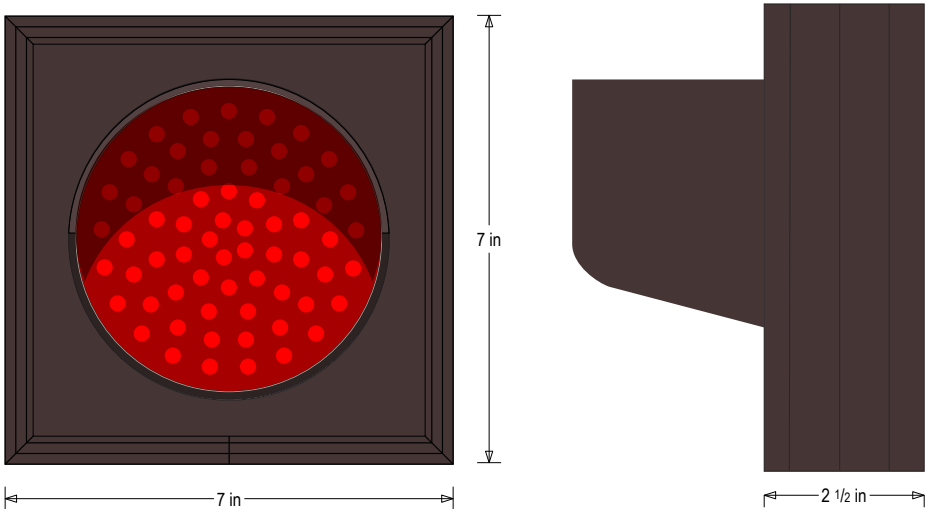

Frame Detail

