

PRODUCT ID: 34528

Outdoor Blank-out LED Backlit Sign

MODEL

PHX734GR-A183/120-277VAC



DIMENSIONS

7" H x 34" W x 2.5" D (est. 6.476 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque

Font: Swiss 721 Bold BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
---------	-----------	--------	------

PARK w/Left Arrow	Green Wide Angle LED	3.0"	0.173-0.075
-------------------	----------------------	------	-------------

EXIT w/Up Arrow	Red Wide Angle LED	3.5"	0.116-0.050
-----------------	--------------------	------	-------------

NOTE: Above messages are independently controlled.

Directional Systems

2201 W 50th St.

Erie, PA 16509

Phone: (877) 827-8296

Fax: (877) 827-8291


Email: sales@directionalsystems.com

Website: www.directionalsystems.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

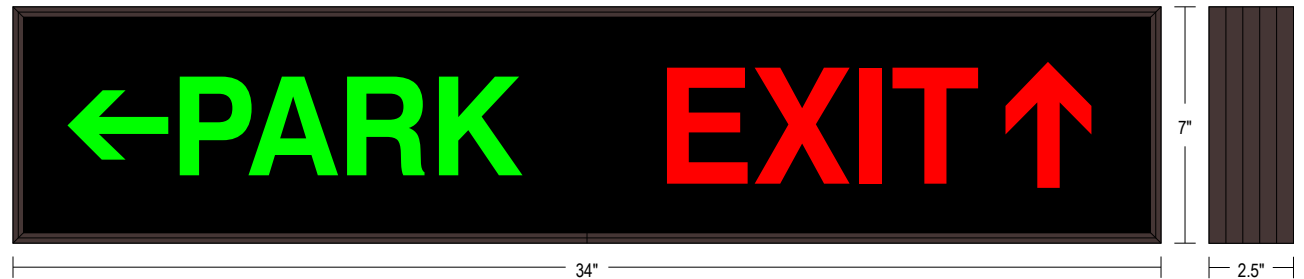

Sample Display Options



Frame Detail

