PRODUCT ID: 40661

Indoor Blank-out LED Backlit Sign

MODEL SBL811R-C521/120-277VAC



DIMENSIONS 8" H x 11" W x 2.5" D (est. 5.277 lbs)

CLASS

Class: SBL Series Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: 1/8" thick, dark grey diffused acrylic Faces: Single Faced Sign Finish: Duranodic Bronze Graphic: Printed graphic applied to surface

ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC UL/cUL Listed: Listed

MESSAGE

Color: Black opaque Font: Swiss 721 Bold BT Illumination: Backlit with LEDs. Message blanks out when off. Sign Messages: See message table below

 MESSAGE
 LED/COLOR
 HEIGHT
 AMPS

 RANGE IN USE
 Red Wide Angle LED
 2.0"
 0.039-0.017

NOTE: Above messages are independently controlled.


Directional Systems 2201 W 50th St. Erie, PA 16509 Phone: (877) 827-8296 Fax: (877) 827-8291 Email: sales@directionalsystems.com Website: www.directionalsystems.com



Copyright (C) 2024 Directional Systems

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

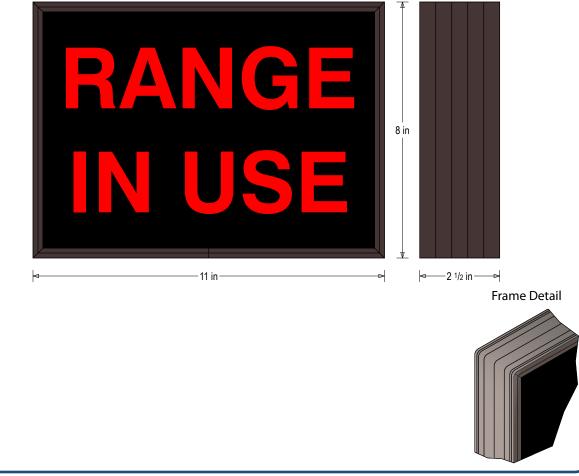

06242022 | DP