PRODUCT ID: 43829

Indoor LED Backlit Sign

MODEL

SBLF811W-L434YK/120-277VAC



DIMENSIONS

8" H x 11" W x 2.5" D (est. 3.232 lbs)

CLASS

Class: SBLF Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC UL/cUL Listed: Listed

MESSAGE

Color: Refer to message table (Black, Yellow Translucent)
Font: Swiss 721 Bold BT

Illumination: Backlit with white LEDs. Message always visible.

Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|--|---|------------|-------------|
| CALITION REMICROWAVE ENERGY CONTROLLED AREA w/Symbol | Rlack Yellow Translucent Vinul White Racklit LFDs | 1.5" 0.75" | 0.044-0.019 |

NOTE: Above messages are independently controlled.

Directional Systems


2201 W 50th St. Erie. PA 16509

Directional Systems Phone: (877) 827-8296 Fax: (877) 827-8291

Email: sales@directionalsystems.com Website: www.directionalsystems.com

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

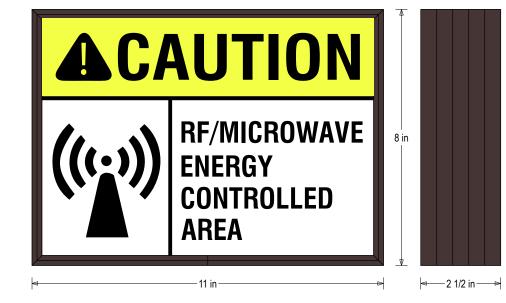

Frame Detail

