

PRODUCT ID: 44633

Outdoor Blank-out LED Backlit Sign

MODEL

PHX742GG-L627



DIMENSIONS

7" H x 42" W x 2.25" D (est. 8.008 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.25" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Mounting Channel:

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque


Font: Swiss 721 Bold Condensed BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

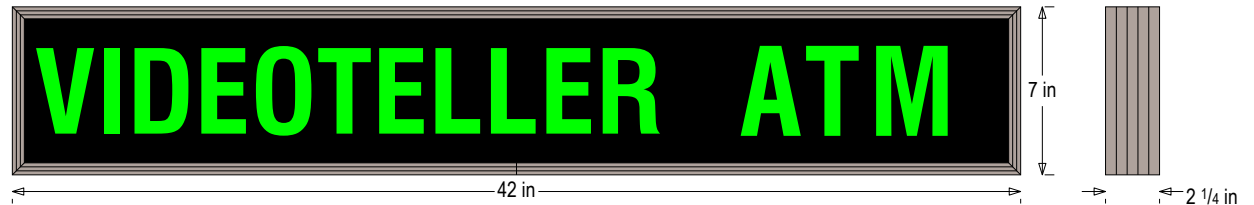

Sample Display Options



| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|-------------|----------------------|--------|-------------|
| VIDEOTELLER | Green Wide Angle LED | 3.75" | 0.827-0.358 |
| ATM | Green Wide Angle LED | 3.75" | 0.413-0.179 |

NOTE: Above messages are independently controlled.

Directional Systems

2250 West 23rd St

Erie, PA 16506

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com

Website: www.directionalsystems.com

Proudly Made in the USA

