

PRODUCT ID: 48641
Outdoor Blank-out LED Direct-view Sign

MODEL
TCL77DRR-224/12-24VDC



DIMENSIONS
7" H x 7" W x 5.5" D (est. 3.908 lbs)

CLASS
CLASS: TCL Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: Corrosion resistant, extruded aluminum frame. 5.5" deep, mitered construction.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Double Faced Sign
Finish: Duranodic Bronze
Mounting Channel: None

ELECTRICAL
Flashing: Factory setting 55fpm.
Input Voltage: 12-24 VDC
Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Red Indicator Dot	Red Wide Angle LED	4.0"	0.333-0.167
Red Indicator Dot (Flashing)	Red Wide Angle LED	4.0"	0.333-0.167
Red Indicator Dot	Red Wide Angle LED	4.0"	0.333-0.167
Red Indicator Dot (Flashing)	Red Wide Angle LED	4.0"	0.333-0.167

NOTE: Above messages are independently controlled.


Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com

Directional
Systems


Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

Side A

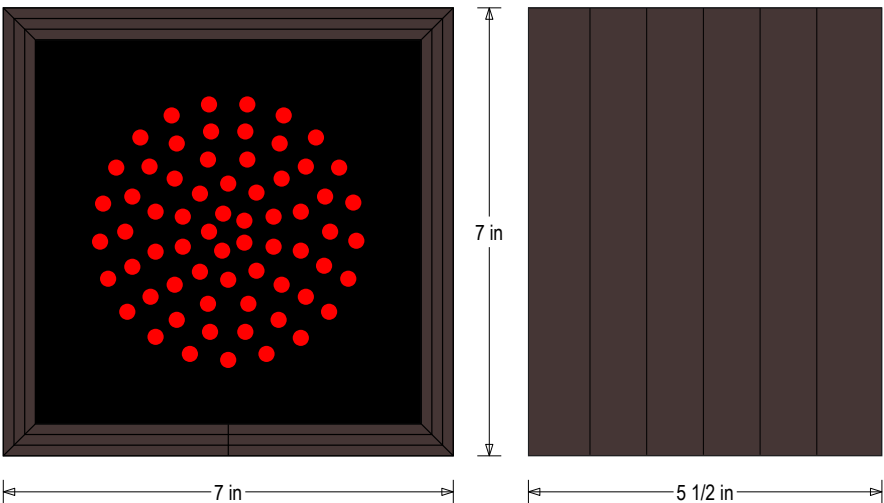

Side B

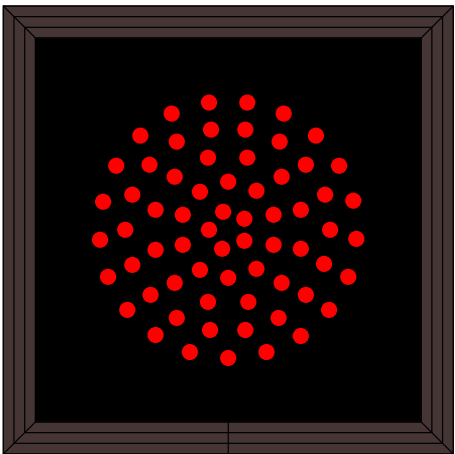

Frame Detail

