

PRODUCT ID: 53957
Outdoor Blank-out LED Backlit Sign

MODEL
PHX1442GGRGGR-300/12-24VDC

DIMENSIONS
14" H x 42" W x 2.5" D (est. 14.697 lbs)



CLASS
Class: PHX Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: 1/8" thick, dark grey diffused acrylic
Faces: Single Faced Sign
Finish: Duranodic Bronze
Graphic: Printed graphic applied to surface
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 12-24 VDC
UL/cUL Listed: Listed for wet locations

MESSAGE
Color: Black opaque
Font: Swiss 721 Bold Condensed BT
Illumination: Backlit with high intensity LEDs. Message blanks out when off
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
ATM	Green Wide Angle LED	3.0"	1.733-0.867
OPEN	Green Wide Angle LED	3.0"	1.307-0.653
CLOSED	Red Wide Angle LED	3.0"	0.520-0.260
TELLER	Green Wide Angle LED	3.0"	1.733-0.867
OPEN	Green Wide Angle LED	3.0"	1.307-0.653
CLOSED	Red Wide Angle LED	3.0"	0.520-0.260

NOTE: Above messages are independently controlled.

Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.



Sample Display Options

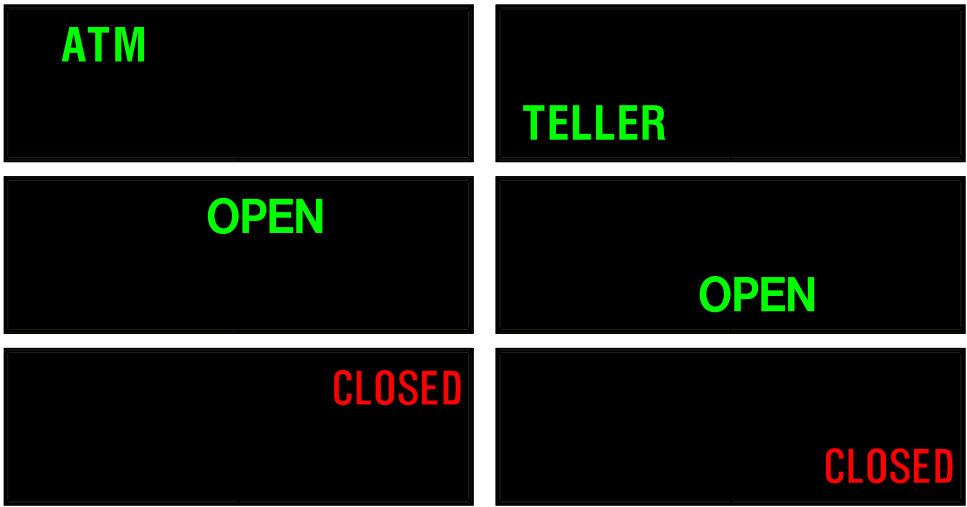

Frame Detail

