

## PRODUCT ID: 53957

### Outdoor Blank-out LED Backlit Sign

#### MODEL

PHX1442GGRGGR-300/12-24VDC



#### DIMENSIONS

14" H x 42" W x 2.5" D (est. 14.697 lbs)

#### CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

#### ELECTRICAL

Flashing: Not Included

Input Voltage: 12-24 VDC

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Color: Black opaque

Font: Swiss 721 Bold Condensed BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
ATM	Green Wide Angle LED	3.0"	1.733-0.867
OPEN	Green Wide Angle LED	3.0"	1.307-0.653
CLOSED	Red Wide Angle LED	3.0"	0.520-0.260
TELLER	Green Wide Angle LED	3.0"	1.733-0.867
OPEN	Green Wide Angle LED	3.0"	1.307-0.653
CLOSED	Red Wide Angle LED	3.0"	0.520-0.260

NOTE: Above messages are independently controlled.

#### Directional Systems

2201 W 50th St.

Erie, PA 16509

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com

Website: www.directionalsystems.com




## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.



### Sample Display Options

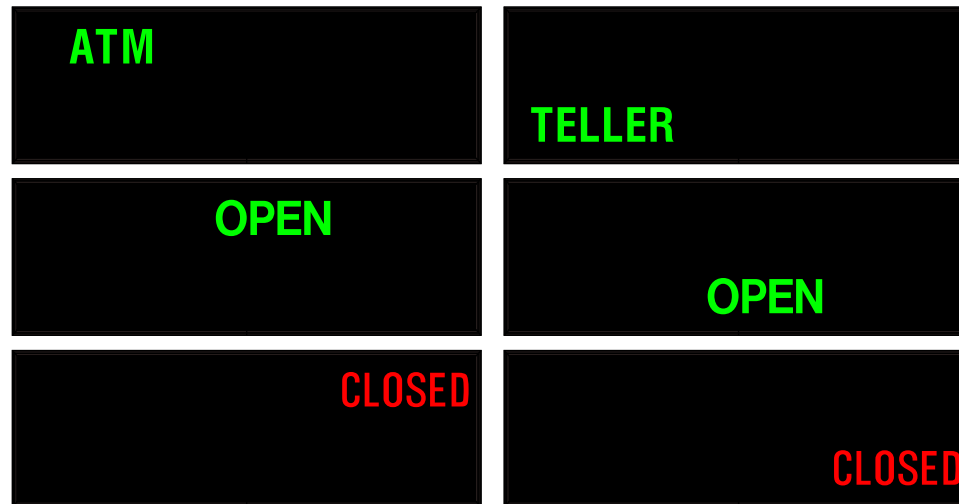

Frame Detail

