# PRODUCT ID: 57154

Outdoor LED Backlit Sign

#### MODEL

PHXF1212W-O521YK/120-277VAC



#### DIMENSIONS

12" H x 12" W x 2.5" D (est. 5.878 lbs)

### **CLASS**

**CLASS**: PHXF Series

Control Method: Switch (not included) or external relay.

# CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface Mounting Channel: None

#### ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

### **MESSAGE**

Color: Translucent custom color (Yellow Translucent(R:255, G:242, B:0), Black

Opaque)

Font: Swiss 721 Bold BT

Illumination: White high intensity LED backlit. Message always visible.

Sign Messages: See message table below

#### LED/COLOR | HEIGHT | AMPS MESSAGE

CAUTION WATCH FOR GATE ARM w/ Gate Hazard Symbol | Yelou Translucent, Black Opaque, White Mide Ande LED | 1.5", 1.25", 4.25" | 0.217-0.094

NOTE: Above messages are independently controlled.

## **Directional Systems**


2201 W 50th St. Erie. PA 16509

**Directional** Systems Phone: (877) 827-8296 Fax: (877) 827-8291

Email: sales@directionalsystems.com Website: www.directionalsystems.com

# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

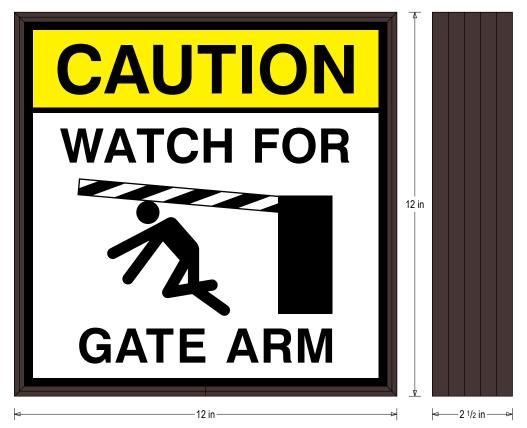

Frame Detail

