

**PRODUCT ID: 59716**  
Indoor LED Backlit Sign

**MODEL**  
SBLF811W-P226BYK/120-277VAC



**DIMENSIONS**  
8" H x 11" W x 2.5" D (est. 0 lbs)

**CLASS**  
Class: SBLF Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Back Construction: 0.050" Lift-n-Shift Back  
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.  
Face Material: 1/8" thick, impact modified acrylic (0000)  
Faces: Single Faced Sign  
Finish: Duranodic Bronze  
Graphic: Printed graphic applied to surface

**ELECTRICAL**  
Flashing: Not Included  
Input Voltage: 120-277 VAC  
UL/cUL Listed: Listed

**MESSAGE**  
Color: Refer to message table (Blue Translucent, Yellow Translucent, Black Opaque)  
Font: Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)  
Illumination: Backlit with white LEDs. Message always visible.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
NOTICE OXYGEN IN USE w/ Oxygen hazard symbol	Blue Translucent, Yellow Translucent, Black Opaque	1.75", 1.375", 3.0"	0.058-0.025


NOTE: Above messages are independently controlled.

**Directional Systems**  
2201 W 50th St.  
Erie, PA 16509  
Phone: (877) 827-8296  
Fax: (877) 827-8291  
Email: sales@directionalsystems.com  
Website: www.directionalsystems.com



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

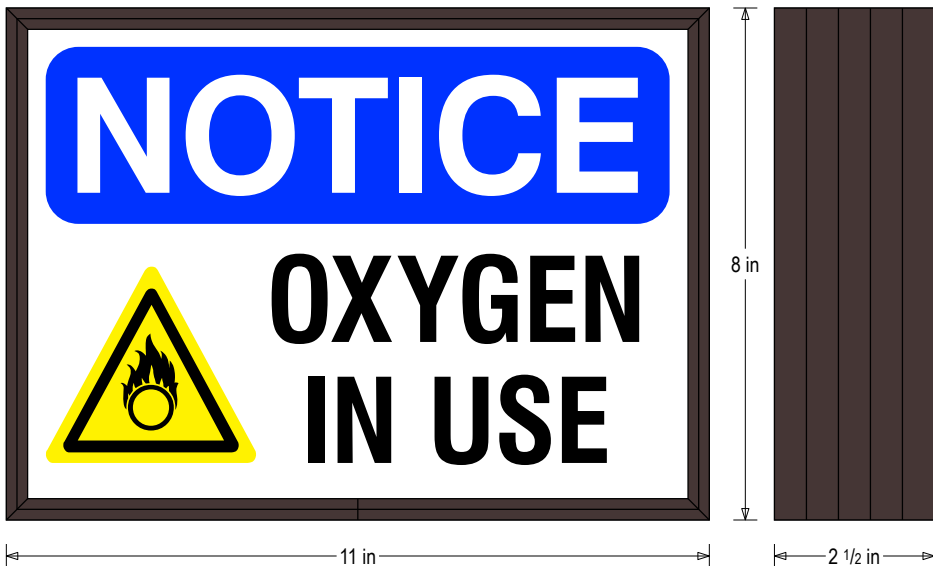

Frame Detail

