

**PRODUCT ID: 59723**  
Indoor LED Backlit Sign

**MODEL**  
SBLF118W-P226BYK/120-277VAC



**DIMENSIONS**  
11" H x 8" W x 2.5" D (est. 3.54 lbs)

**CLASS**  
**Class:** SBLF Series  
**Control Method:** Switch (not included) or external relay.

**CONSTRUCTION**  
**Back Construction:** 0.050" Lift-n-Shift Back  
**Cabinet:** 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.  
**Face Material:** 1/8" thick, impact modified acrylic (0000)  
**Faces:** Single Faced Sign  
**Finish:** Duranodic Bronze  
**Graphic:** Printed graphic applied to surface

**ELECTRICAL**  
**Flashing:** Not Included  
**Input Voltage:** 120-277 VAC  
**UL/cUL Listed:** Listed

**MESSAGE**  
**Color:** Refer to message table (Blue Translucent, Yellow Translucent, Black Opaque)  
**Font:** Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)  
**Illumination:** Backlit with white LEDs. Message always visible.  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
NOTICE OXYGEN IN USE w/ Oxygen hazard symbol	Blue Translucent, Yellow Translucent, Black Opaque	1.75", 1.375", 3.0"	0.058-0.025


NOTE: Above messages are independently controlled.

**Directional Systems**  
2201 W 50th St.  
Erie, PA 16509  
Phone: (877) 827-8296  
Fax: (877) 827-8291  
Email: sales@directionalsystems.com  
Website: [www.directionalsystems.com](http://www.directionalsystems.com)



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

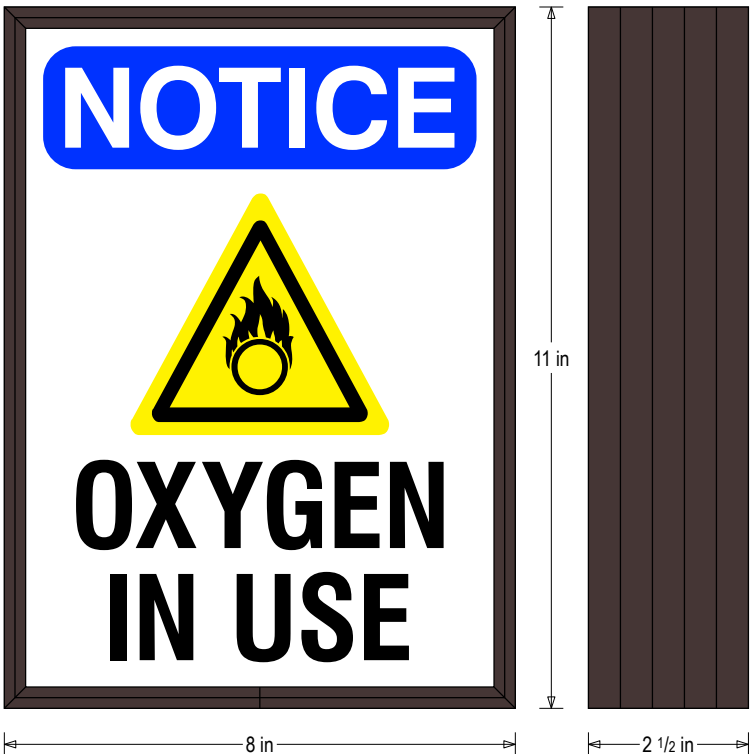

Frame Detail

