

PRODUCT ID: 59725
Indoor LED Backlit Sign

MODEL
SBLF118W-P228YRK/120-277VAC



DIMENSIONS
11" H x 8" W x 2.5" D (est. 3.54 lbs)

CLASS
Class: SBLF Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: 1/8" thick, impact modified acrylic (0000)
Faces: Single Faced Sign
Finish: Duranodic Bronze
Graphic: Printed graphic applied to surface

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed

MESSAGE
Color: Refer to message table (Yellow, Red translucent, Black opaque)
Font: Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)
Illumination: Backlit with white LEDs. Message always visible.
Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|---|---|----------------------|-------------|
| Caution symbol / Oxygen in use / No Smoking symbol / No open flames | Yellow, Red translucent, Black opaque, White Wide-Angle LED | 0.875", 2.375", 2.5" | 0.058-0.025 |

NOTE: Above messages are independently controlled.


Directional Systems
2201 W 50th St.
Erie, PA 16506
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com



Website: www.directionalsystems.com Proudly Made in the USA

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

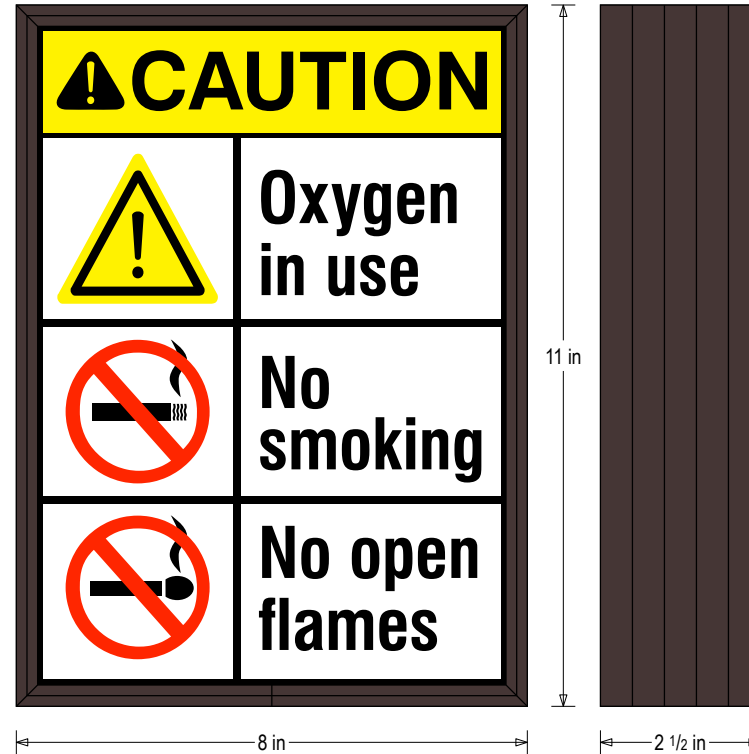

Frame Detail

