## PRODUCT ID: 59725

Indoor LED Backlit Sign

#### MODEL

SBLF118W-P228YRK/120-277VAC



#### DIMENSIONS

11" H x 8" W x 2.5" D (est. 3.54 lbs)

#### **CLASS**

Class: SBLF Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

#### **ELECTRICAL**

Flashing: Not Included Input Voltage: 120-277 VAC UL/cUL Listed: Listed

#### **MESSAGE**

Color: Refer to message table (Yellow, Red translucent, Black opaque)
Font: Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)
Illumination: Backlit with white LEDs. Message always visible.

Sign Messages: See message table below

#### **MESSAGE** LED/COLOR | HEIGHT | AMPS

Extendio souto CATION Extendio souto vi Oversi in use Ni Sondion Souto di Inspirio di Oversi in use in Sondion Souto di Oversi in Sondioni di Oversi in Sondi

NOTE: Above messages are independently controlled.

### **Directional Systems**


2201 W 50th St. Erie. PA 16509

**Directional** Systems Phone: (877) 827-8296 Fax: (877) 827-8291

Email: sales@directionalsystems.com Website: www.directionalsystems.com

# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

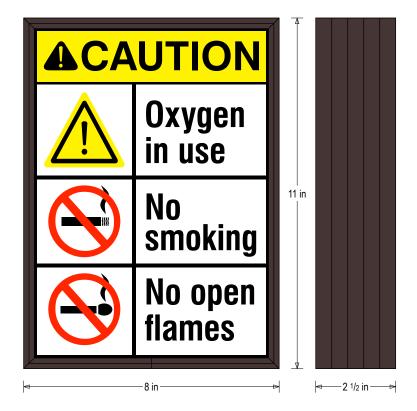

Frame Detail

