

## PRODUCT ID: 67684

### DOT LED Blank-Out Sign

#### MODEL

DOT2323RG-175/100-240VAC



#### DIMENSIONS

23" H x 23" W x 6.5" D (est. 44.655 lbs)

#### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

#### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	16.75"	0.187-0.078
Down Arrow	Green Narrow Angle LED	17.5"	0.222-0.093

NOTE: Above messages are independently controlled.

#### Directional Systems

2201 W 50th St.

Erie, PA 16509

Phone: (877) 827-8296

Fax: (877) 827-8291


Email: sales@directionalsystems.com

Website: www.directionalsystems.com





## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

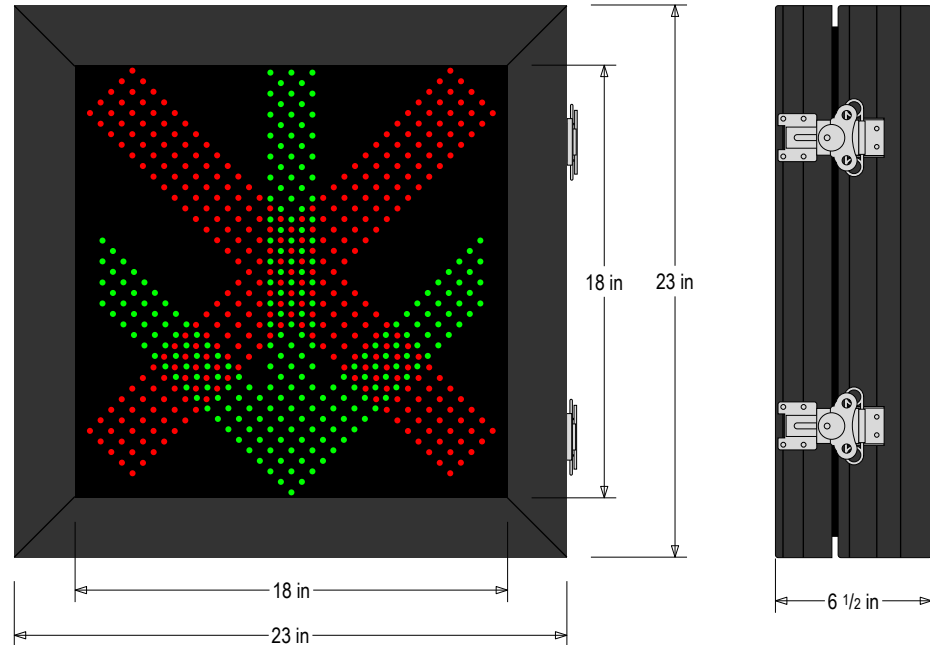

### Sample Display Options



### Frame Detail

