

PRODUCT ID: 68380
DOT LED Blank-Out Sign

MODEL
DOT2375RG-100TS/100-240VAC



DIMENSIONS
23" H x 75" W x 6.5" D (est. 111.726 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.
Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: IR photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Open	Green Narrow Angle LED	12.0"	0.770-0.321
CLOSED	Red Narrow Angle LED	12.0"	0.346-0.144


NOTE: Above messages are independently controlled.

Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com

Directional
Systems

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

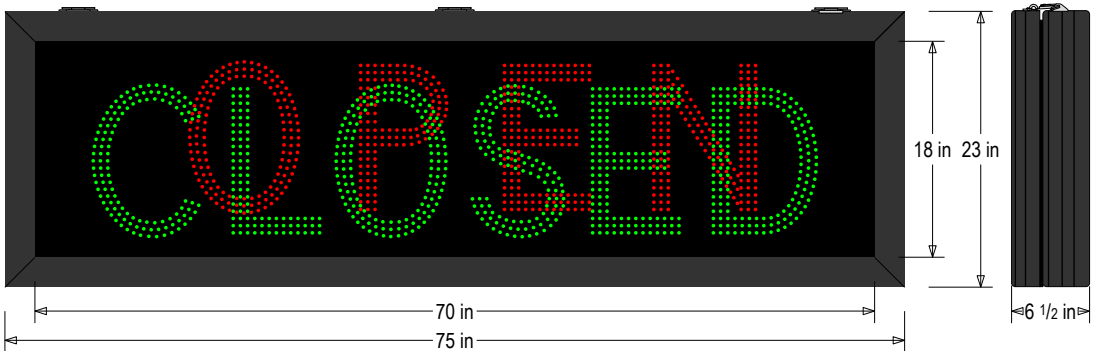

Sample Display Options



Frame Detail

