PRODUCT ID: 69374

Outdoor LED Backlit Sign

MODEL

PHXF1414WW-T031RG/120-277VAC



DIMENSIONS

14" H x 14" W x 2.5" D (est. 7.304 lbs)

CLASS

CLASS: PHXF Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface Mounting Channel: None

ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Translucent custom color (Red, Green Translucent)

Font: Swiss 721 Bold BT

Illumination: White high intensity LED backlit. Message always visible.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
WAIT w/ Boarder	Red Translucent, White Wide Angle LED	2.5"	0.152-0.066
ENTER w/ Boarder	Green Translucent, White Wide Angle LED	2.25"	0.152-0.066

NOTE: Above messages are independently controlled.

Directional Systems

Directional Systems


2201 W 50th St. Erie. PA 16509

Phone: (877) 827-8296 Fax: (877) 827-8291

Email: sales@directionalsystems.com Website: www.directionalsystems.com

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

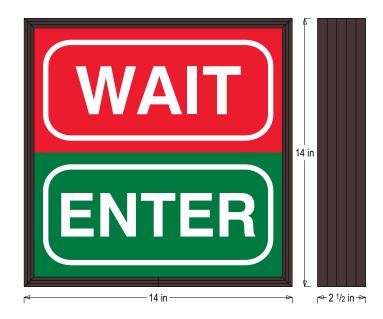

Sample Display Options



