PRODUCT ID: 7501

Outdoor Blank-out LED Direct-view Sign

MODEL

TCL1212DRGRG-175DS/120-277VAC

DIMENSIONS

12" H x 12" W x 5.5" D (est. 8.586 lbs)

CLASS

CLASS: TCL Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back
Cabinet: Corrosion resistant, extruded aluminum frame. 5.5" deep, mitered construction.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Double Faced Sign
Finish: Duranodic Bronze
Mounting Channel: None

ELECTRICAL

Flashing: Not Included
Input Voltage: 120-277 VAC
Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Wide Angle LED	10.0"	0.039-0.017
DOWN ARROW	Green Wide Angle LED	9.75"	0.045-0.020
X	Red Wide Angle LED	10.0"	0.039-0.017
Down Arrow	Green Wide Angle LED	9.75"	0.045-0.020

NOTE: Above messages are independently controlled.

Directional Systems
2201 W 50th St.
Erie, PA 16509
Phone: (877) 827-8296
Fax: (877) 827-8291
Email: sales@directionalsystems.com
Website: www.directionalsystems.com

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

Side A

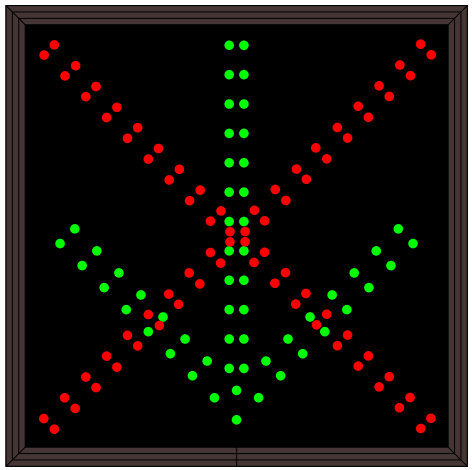

Side B

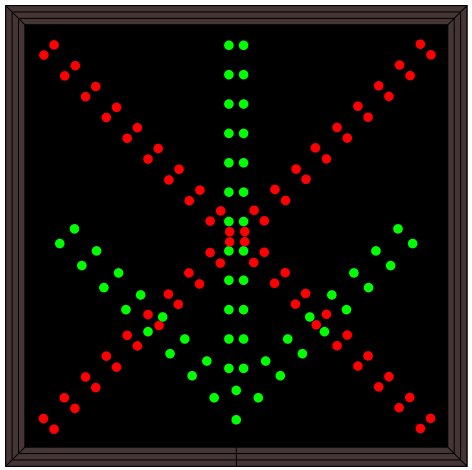

Sample Display Options

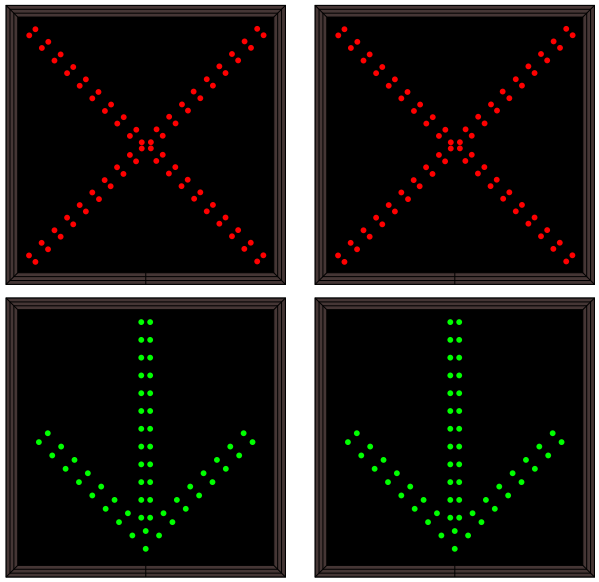

Frame Detail



Copyright (C) 2026 Directional Systems