


Mounting - Standard Lift'n Shift Wall Mount

Lift'n Shift Wall Mount - Integrated into many of our product lines the Lift'n Shift wall mount makes installation very simple. Just remove the two screws on the bottom of the sign to remove the back panel. Mount the back panel using the knockouts for mounting holes and supplying power. Next, hang the sign from the top hinge as you make your electrical connections. Close the sign and replace the screws you removed earlier.

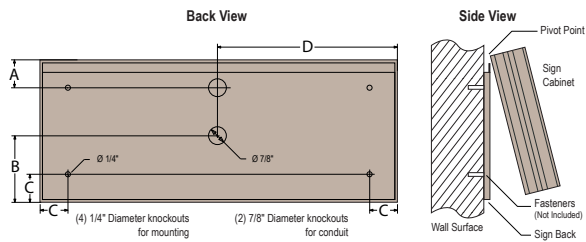

Cabinet High x Wide (Inches)	Dimension A Mounting Hole Vertical (Half of Sign Height)	Dimension B Center Knock-out Vertical	Dimension C Mounting Hole Horizontal	Dimension D Center Knock-out Horizontal (Half of Sign Width)
7 x 7	1½"	3½"	1¼"	3½"
7 x 18	1½"	3½"	1¼"	9"
7 x 26	1½"	3½"	1¼"	13"
7 x 34	1½"	3½"	1¼"	17"
7 x 42	1½"	3½"	1¼"	21"
10 x 26	1½"	5"	1¼"	13"
12 x 12	1½"	6"	1¼"	6"
14 x 18	1½"	7"	1¼"	9"
14 x 26	1½"	7"	1¼"	13"
14 x 34	1½"	7"	1¼"	17"
14 x 42	1½"	7"	1¼"	21"
18 x 18	1½"	9"	1¼"	9"