


Ceiling Mount

- Remove the back panel.
- Mount the ceiling bracket to the desired surface (*Fasteners Not Supplied*).
- Mount the back panel to the ceiling bracket (*Fasteners Not Supplied*).


Note: Make appropriate wiring connections per local codes.



Note: Do not over tighten or distort back panel. Hang the cabinet on the top edge of the back panel

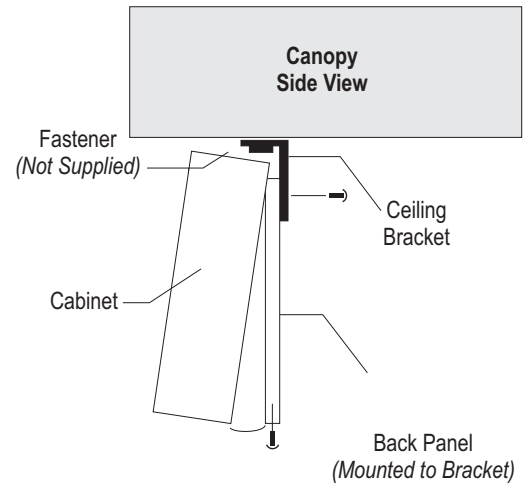

- Hinge cabinet back and replace the screws that were removed in step one on the reverse side.

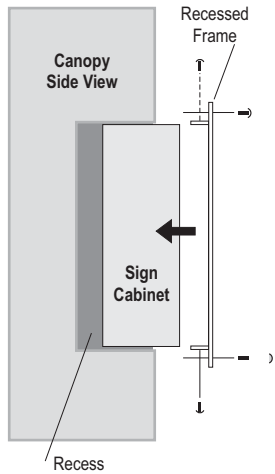

Recessed Frame Mount

- Fasten the recessed mounting bracket flush with the front of the Neon traffic controller cabinet.
- Slide assembled unit into the recess opening.
- Fasten the mounting bracket to the face of the opening with four fasteners (*Not Supplied*).





Note: Make appropriate wiring connections per local codes.

| Model | Wall Opening | Outer Dimension |
|-------------|---|---|
| TCI/L V/H | 7 ¹ / ₂ " x 14 ¹ / ₂ " | 10 ³ / ₄ " x 17 ³ / ₄ " |
| TC/L/U 718 | 7 ¹ / ₂ " x 18 ¹ / ₂ " | 10" x 21" |
| TC/L 726 | 7 ¹ / ₂ " x 26 ¹ / ₂ " | 10" x 29" |
| TC/L/U 734 | 7 ¹ / ₂ " x 34 ¹ / ₂ " | 10" x 37" |
| TC/L 742 | 7 ¹ / ₂ " x 42 ¹ / ₂ " | 10" x 45" |
| TC/L/U 1418 | 14 ¹ / ₂ " x 18 ¹ / ₂ " | 17" x 21" |
| TC/L 1426 | 14 ¹ / ₂ " x 26 ¹ / ₂ " | 17" x 29" |
| TC/L 1434 | 14 ¹ / ₂ " x 34 ¹ / ₂ " | 17" x 37" |
| TC/L 1442 | 14 ¹ / ₂ " x 42 ¹ / ₂ " | 17" x 45" |
| TC/L 2118 | 21 ¹ / ₂ " x 18 ¹ / ₂ " | 24" x 21" |
| TC/L 2126 | 21 ¹ / ₂ " x 26 ¹ / ₂ " | 24" x 29" |
| TC/L 2134 | 21 ¹ / ₂ " x 34 ¹ / ₂ " | 24" x 37" |
| TC/L 2818 | 28 ¹ / ₂ " x 18 ¹ / ₂ " | 31" x 21" |
| TCL 77 | 7 ¹ / ₂ " x 7 ¹ / ₂ " | 10" x 10" |
| TCL 1026 | 10 ¹ / ₂ " x 26 ¹ / ₂ " | 13" x 29" |
| TCL 1212 | 12 ¹ / ₂ " x 12 ¹ / ₂ " | 15" x 15" |
| TCL 1818 | 18 ¹ / ₂ " x 18 ¹ / ₂ " | 21" x 21" |

Optional Control Switch - Wiring Schematic

Wiring diagram for teller control switch with three position switch and green and red indicator lights.

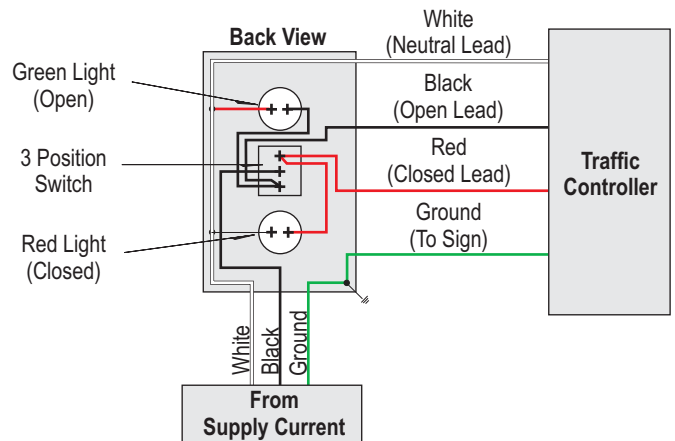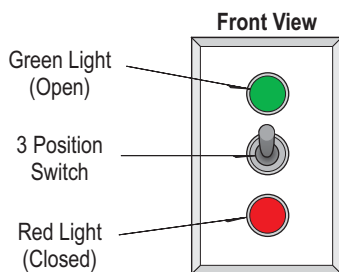

For Supply Connections Use Wire Rated
For At Least 110° C
120 Volts 0.6 Amps