

## PRODUCT ID: 35689

### Outdoor Blank-out LED Direct-view Sign

#### MODEL

TCL1260DRR-H737DS/120-277VAC



#### DIMENSIONS

12" H x 60" W x 7.5" D (est. 50.479 lbs)

#### CLASS

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: Mitered extruded aluminum frame with 2 hinged faces. LED displays installed with sign-in-sign construction. Moisture absorbent interior coating

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Double Faced Sign

Finish: Duranodic Bronze

Mounting Channel: None

#### ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

Photodimming: None

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

| MESSAGE   | LED/COLOR          | HEIGHT | AMPS        |
|-----------|--------------------|--------|-------------|
| AMBULANCE | Red Wide Angle LED | 7.0"   | 0.327-0.142 |
| AMBULANCE | Red Wide Angle LED | 7.0"   | 0.327-0.142 |

NOTE: Above messages are independently controlled.

#### Directional Systems

2201 W 50th St.

Erie, PA 16509

Phone: (877) 827-8296

Fax: (877) 827-8291

Email: sales@directionalsystems.com


Website: www.directionalsystems.com



## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

Side A

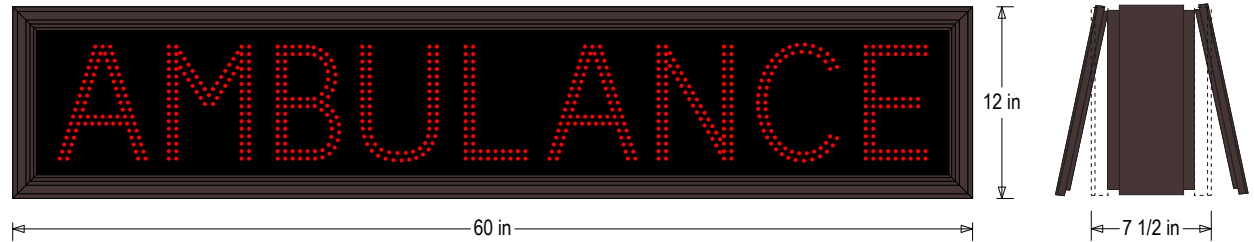

Side B



Frame Detail

